
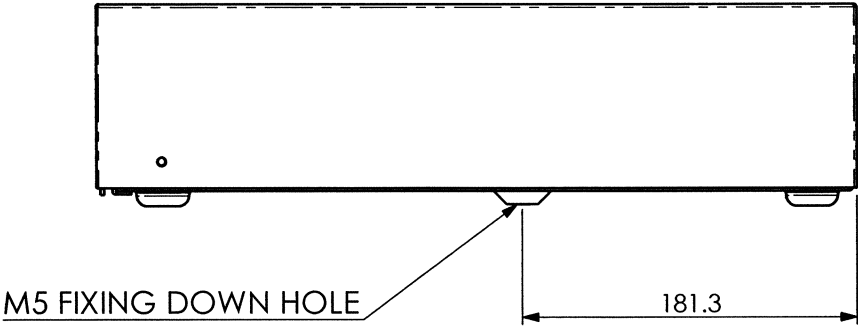
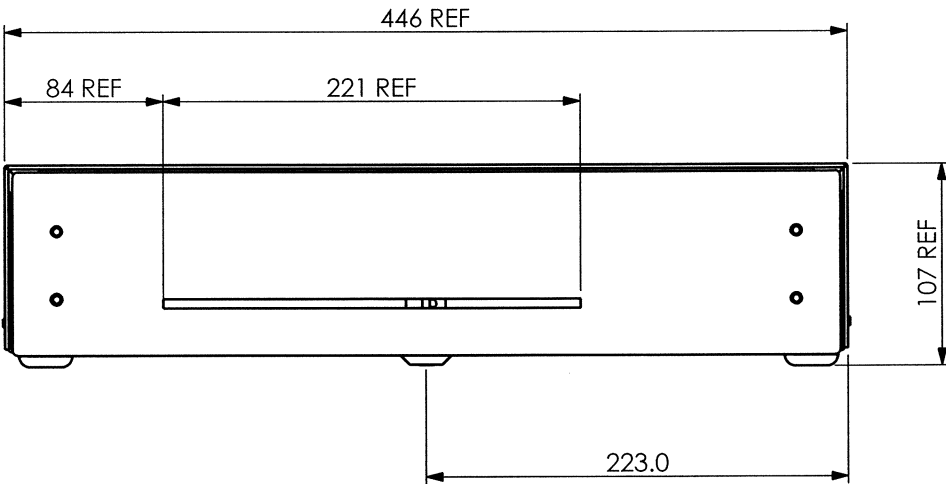
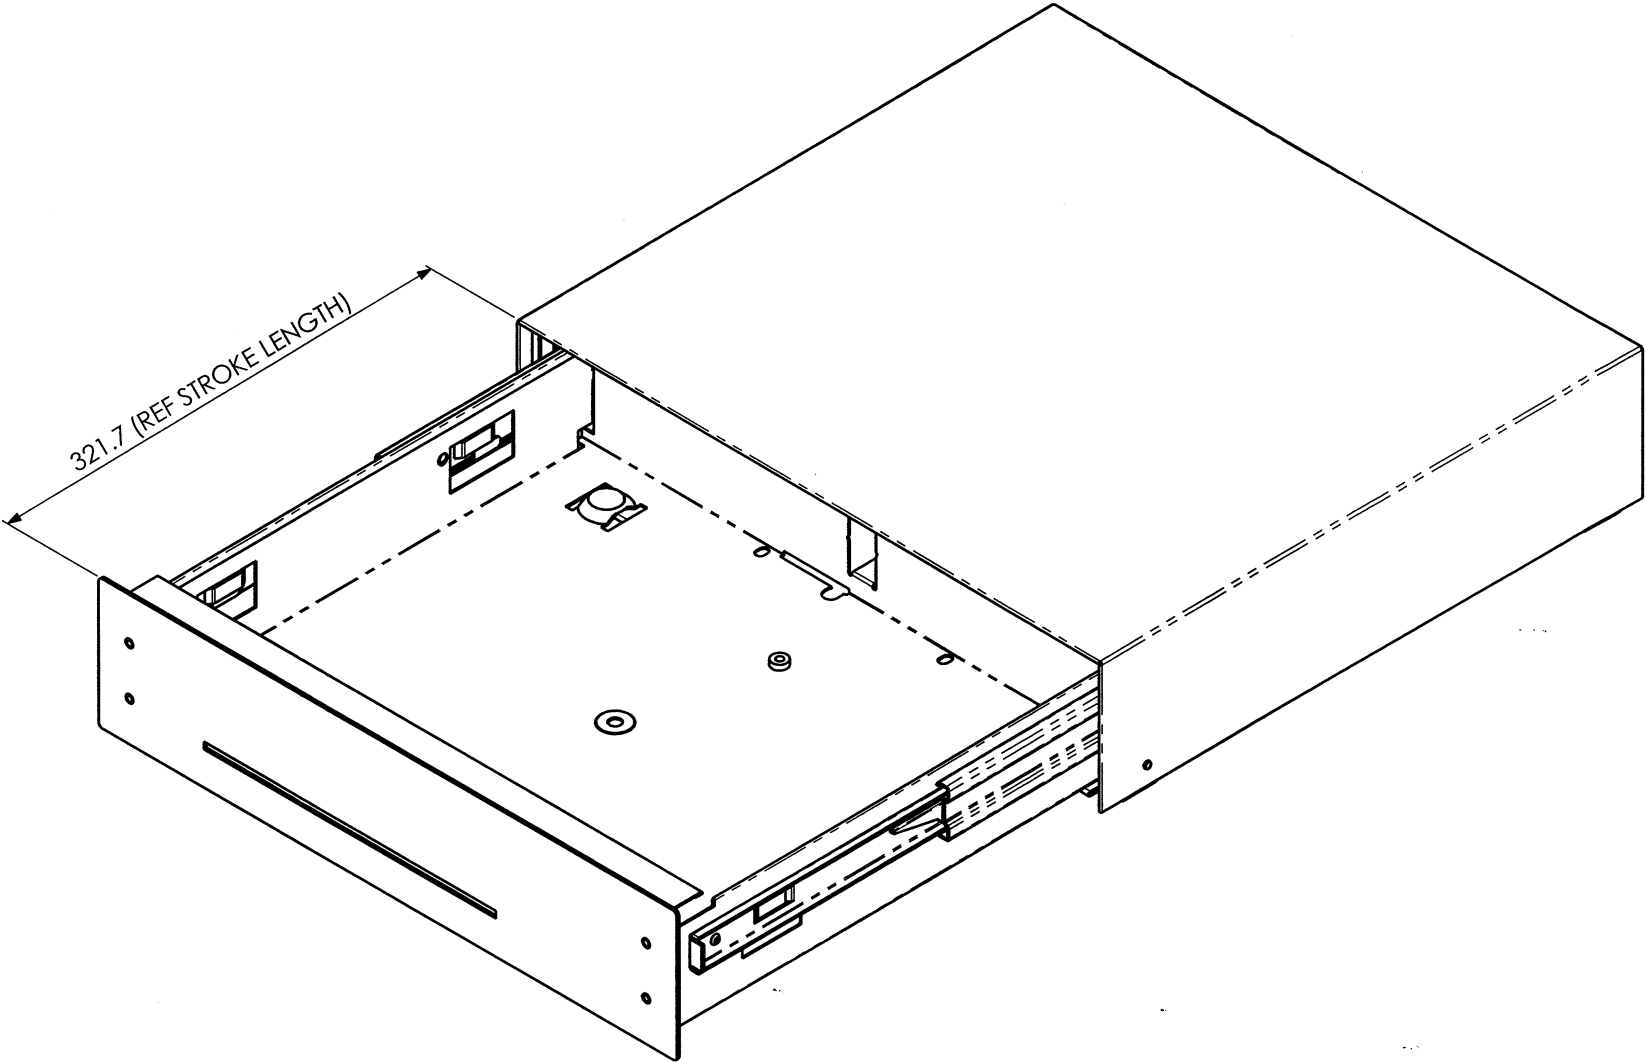


IF IN DOUBT - ASK


REMOVE ALL BURRS & SHARP EDGES

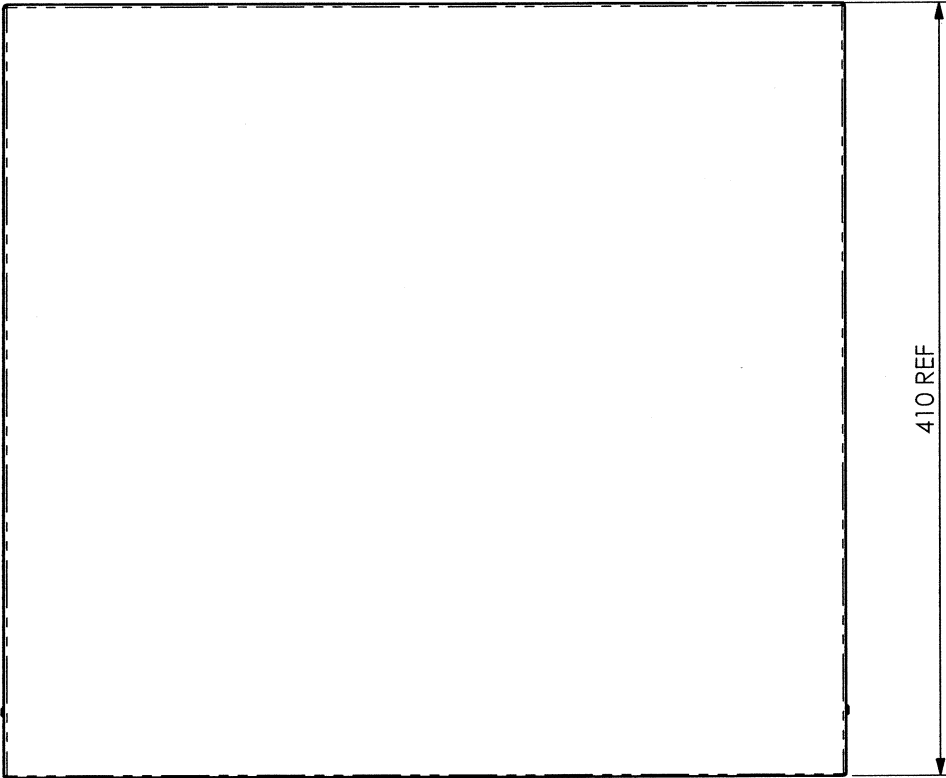

E		10758	18/01/2008	CM	UNSPECIFIED TOLERANCES			***	VEE	MATERIAL:			CASH BASES 		Cash Bases Ltd. Newhaven, East Sussex BN9 0LA United Kingdom www.cashbases.co.uk		Tel: +44 (0)1273 616300 Fax: +44 (0)1273 512010			
---		---	---	---	LINEAR	HOLE DIA	ANGULAR	---	See Part Drawings											
---		---	---	---	0 = ±0.5	0 = ±0.5	±0.25°	INDICATES INSPECTION DIMENSION	DRAWN			FINISH:								
---		---	---	---	0.0 = ±0.25	0.0 = ±0.25	CAB		See Part Drawings											
REV	ECP No	DATE	NAME		0.00 = ±0.15 0.00 = +0.0/-0.09			 DO NOT SCALE	DATE	SIMILAR TO		PROJECT		TITLE		DRAWING NUMBER		REV		
PROD. ENG.	APPROVED BY:	CHECKED BY:		THIRD ANGLE PROJECTION TO BS 8888. ALL DIMS IN mm					02/02/2000	---		---		SL3000		91409		E		
© No part of this drawing may be reproduced or transmitted by any form, or in any means including photocopying and recording, without prior permission of Cash Bases Ltd. Newhaven, East Sussex.																				
1		2		3		4		5		6		7		8		9		10		

1		2		3	
ITEM NO.	PART NUMBER	DESCRIPTION		QTY.	
1	19765	ADJUSTING PLATE		1	
2	30049	SPR EXT L120mm WD0.56mm OD5.5mm		2	
3	40030	SECURITY BUNG		1	
4	40068LH	LH EJECTOR SLIDE		1	
5	40068RH	RH EJECTOR SLIDE		1	
6	50008	E CLIP 7.37 I/D		2	
7	50010	E-CLIP FOR 60306 (N1500-0015)		2	
8	50018	E CLIP 3.73 I/D		4	
9	50115	WASHER (M4)		4	
10	50175	M5 WASHER		4	
11	50236	NYLOC NUT M4		4	
12	50520	M4x6 (SOC BUTT HEAD M/C SCREW)		2	
13	50578	CARP NUT M4 (C-1041)		8	(E)
14	50743	M3 x 6 TORX PAN HEAD WITH TUFLOC 180		2	(E)
15	60306	NCD - LATCH PIN		1	
16	80856	NEW CONCEPT MECH		1	
17	81048	BUMPON (SQUARE 30x30x8 HIGH)		4	
18	81152	RUNNER 332/657 (BIN YUANN SF-46 SERIES)		2	
19	81407	PORON 50 SHORE SQ PAD		2	(E)
20	F00638	BASEBOARD		1	
21	F00639	TRAY		1	
22	F00640	CASE		1	
23	F00998	DRAWER FRONT		1	
24	F01423	BRACKET - RUNNER STOP		2	(E)

REMOVE ALL BURRS & SHARP EDGES
IF IN DOUBT - ASK

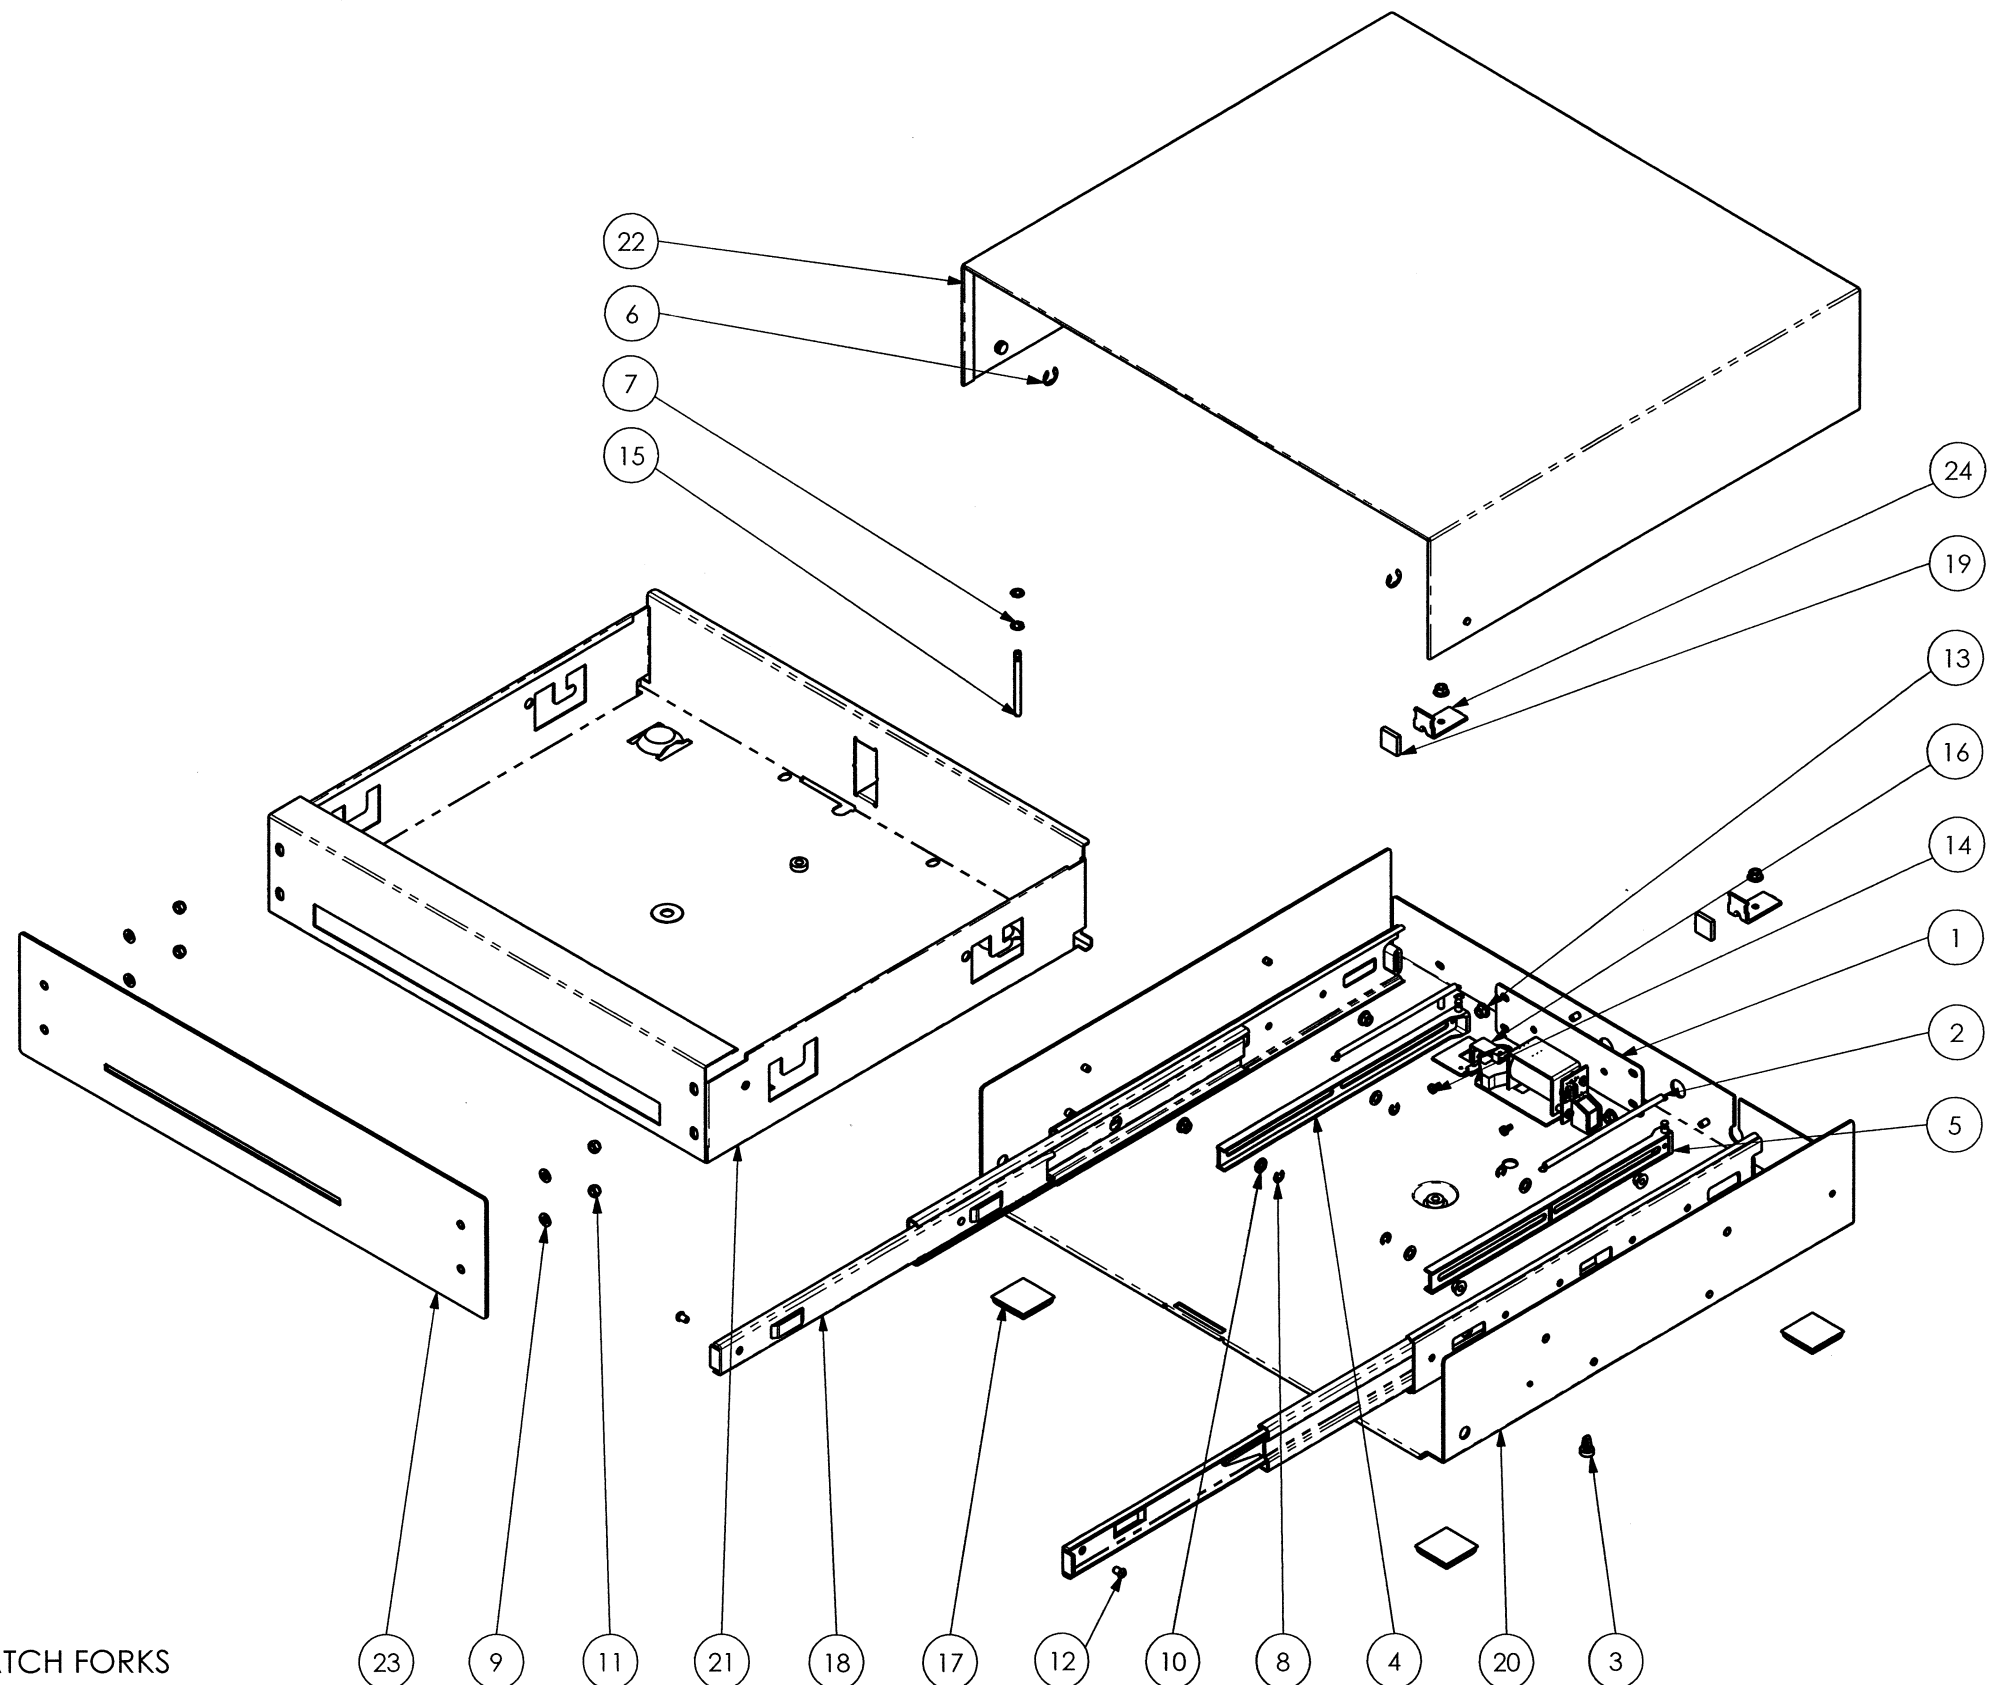

NOTES:- USE M4 CARPS NUT (x4) TO HOLD
RUNNER SLIDES TO BASEBOARD.
LOCTITE THE NUTS IN PLACE.
DISCONNECT INNER SLIDE MEMBER &
LOCATE ON TRAY SIDES, FIX IN POSTION
USING M4x6 SCREWS WITH LOCTITE.

FABRICATED CASH DRAWER BUILD NOTES

ADD GREASE (Pt.No.80548) TO THE LATCH PIN AND LATCH FORKS

E	10758	18/01/2008	CM	UNSPECIFIED TOLERANCES		*** INDICATES INSPECTION DIMENSION	VEE	MATERIAL:				CASH BASES 		Cash Bases Ltd. Newhaven, East Sussex BN9 0LA United Kingdom www.cashbases.co.uk		Tel: +44 (0)1273 616300 Fax: +44 (0)1273 512010			
---	---	---	---	LINEAR 0 = ±0.5 0.0 = ±0.25 0.00 = ±0.15	HOLE DIA 0 = ±0.5 0.0 = ±0.25 0.00 = +0.0/-0.09		ANGULAR ±0.25°	DRAWN CAB	FINISH:										
---	---	---	---						See Part Drawings										
REV	ECP No	DATE	NAME						See Part Drawings										
PROD. ENG.		APPROVED BY:		CHECKED BY:		THIRD ANGLE PROJECTION TO BS 8888. ALL DIMS IN mm  DO NOT SCALE	DATE	SIMILAR TO		PROJECT		TITLE		DRAWING NUMBER		REV			
							02/02/2000	---				SL3000		91409		E			
© No part of this drawing may be reproduced or transmitted by any form, or in any means including photocopying and recording, without prior permission of Cash Bases Ltd. Newhaven, East Sussex.																			
1		2		3		4		5		6		7		8		9		10	

© No part of this drawing may be reproduced or transmitted by any form, or in any means including photocopying and recording, without prior permission of Cash Bases Ltd. Newhaven, East Sussex.