


MANUFACTURING/WIRING NOTES:

TEST USING CBTI004 WITH BOX CBTU002
FOR 24V
Ⓑ USE CBTI122 WITH BOX CBTU001
FOR 12V

CASH BASES

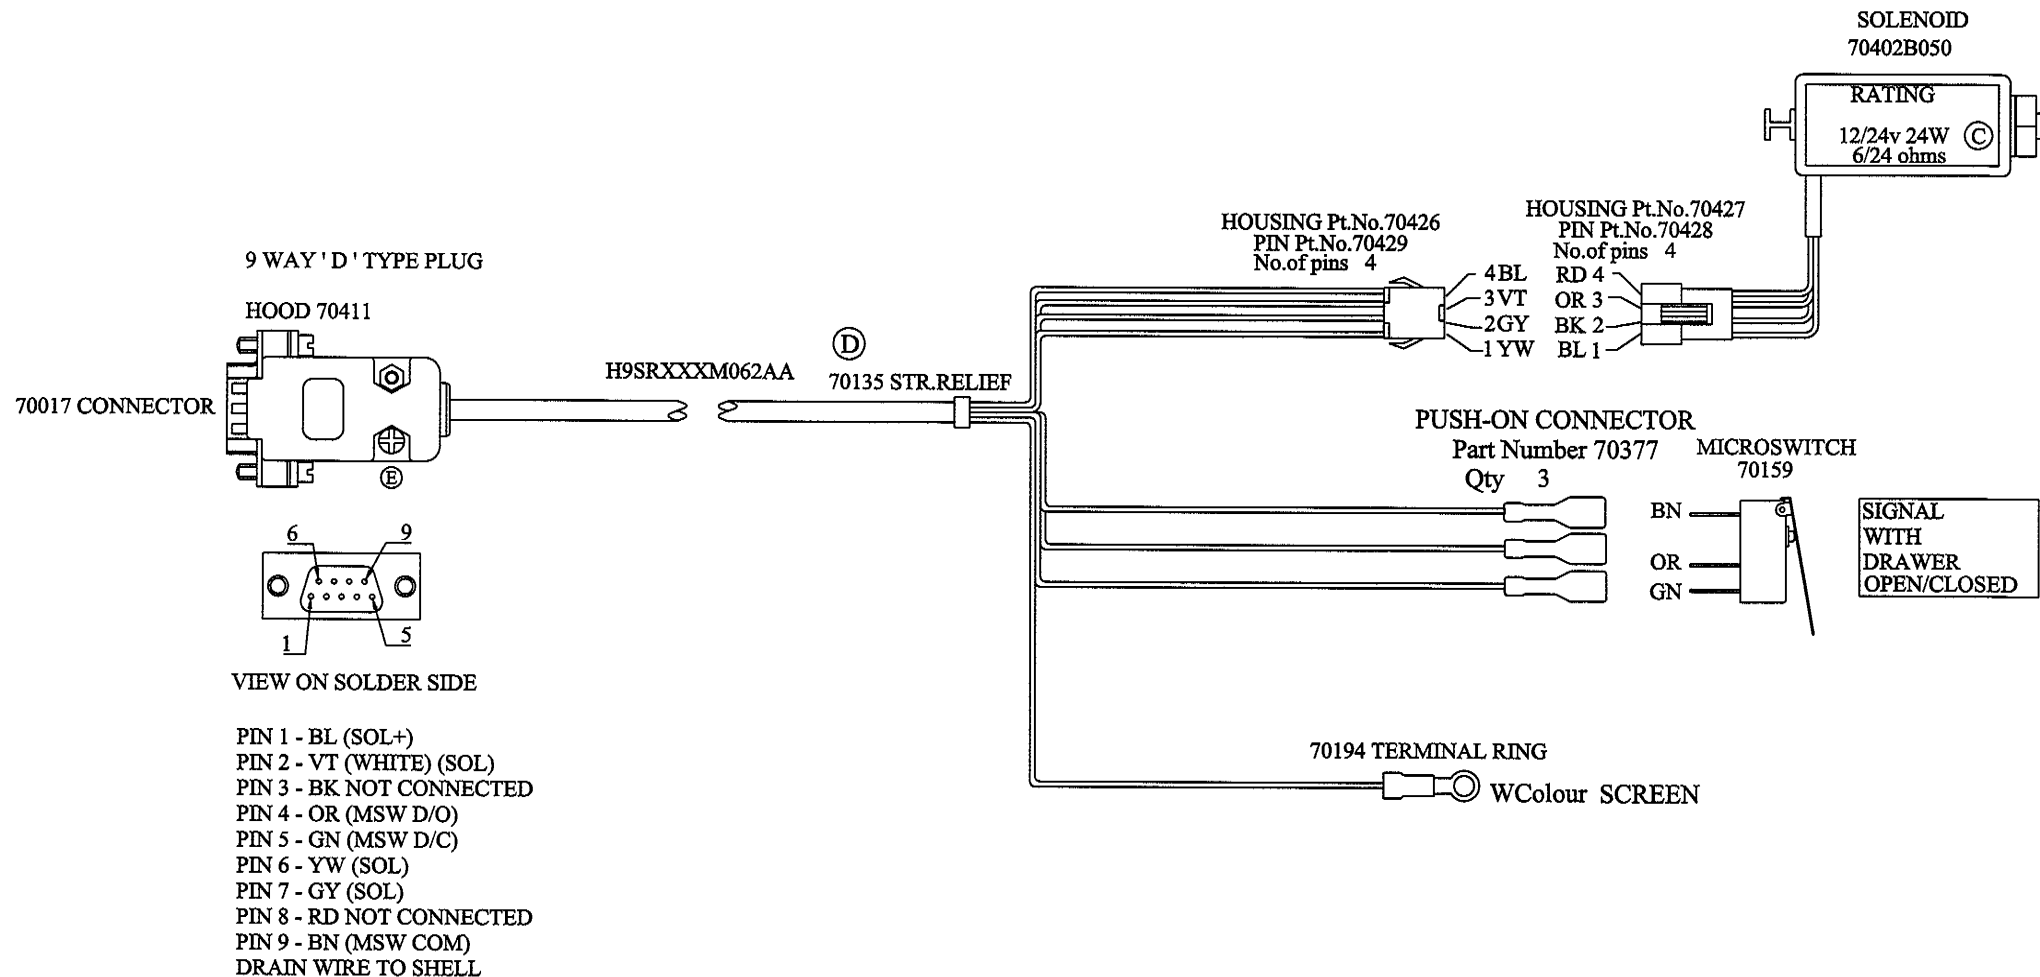

REVISION/DATE	F 22/11/2010					TOLERANCES	TITLE	DRG.NO.	REV
ECP No	20965					LENGTHS BELOW 1m TO BE -0; +5mm	EU FLIP LID INTERFACE	DUA-M23	F
DRAWN BY	MJ					LENGTHS 1-2m TO BE -0; +10mm	12/24V S.D.C/O.	FIRST USED ON	
CHECKED BY						LENGTHS ABOVE 2m TO BE -0; +15mm		SHT. 1 OF	1
APPROVED BY						ALL DIMENSIONS IN mm UNLESS OTHERWISE STATED			

Ⓒ No part of this drawing may be reproduced or transmitted by any form, or in any means including photocopying and recording, without the prior permission of Cash Bases GB Ltd. Newhaven, East Sussex.