

MANUFACTURING/WIRING NOTES:



USE CBT1167 WITH BOX CBTU002
FOR 12V & 24V

IF IN DOUBT - ASK

MANDATORY

70391A050 - Solenoid Assembly


25061 - Harness Assembly

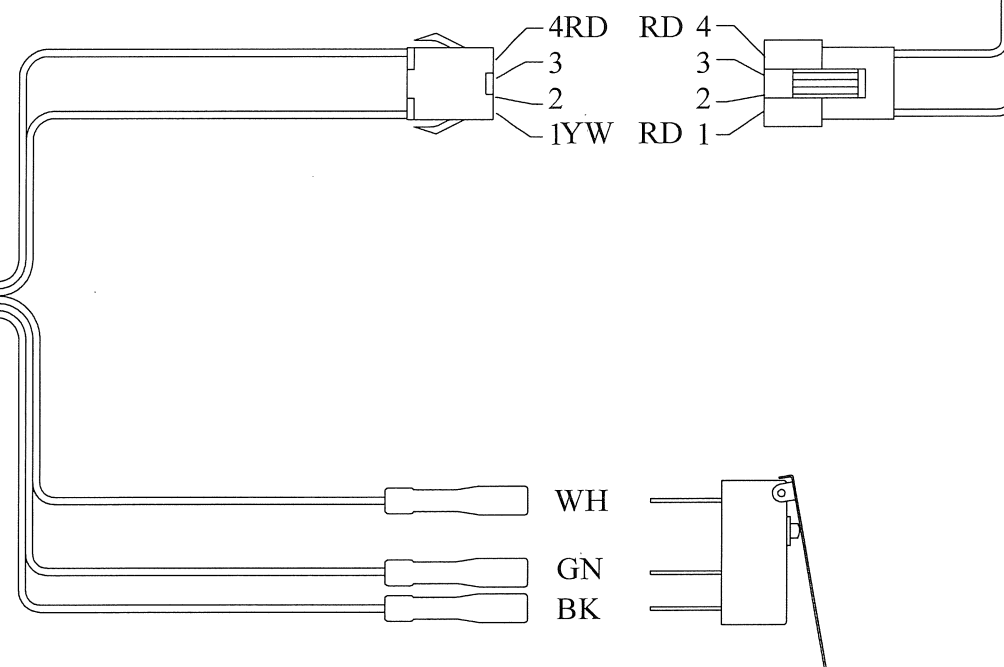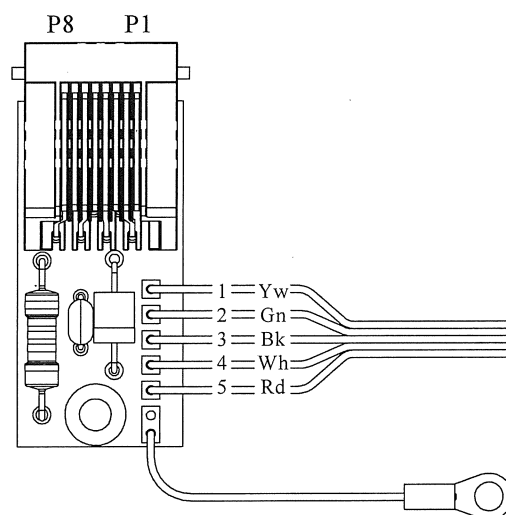

70391A050
11.5 ohms

70159 - MICROSWITCH

P1 P8



VIEW ON
MATING FACE


PIN 1 - Frame Ground
PIN 2 - Solenoid Signal (0v)
PIN 3 - MSW (D.O.)
PIN 4 - MSW (D.C.)
PIN 5 - Solenoid +11Ω
PIN 6 - Solenoid +24V
PIN 7 - MSW (Common)
PIN 8 - -----

A	24859	07/12/2015	KPRS
REV	ECP No	DATE	NAME
PROD. ENG.	APPROVED BY:	CHECKED BY:	

UNSPECIFIED TOLERANCES

LENGTHS BELOW 1 m TO BE - 0; + 5 mm
LENGTHS 1 - 2 m TO BE - 0; + 10 mm
LENGTHS ABOVE 2 m TO BE - 0; + 15 mm

THIRD ANGLE PROJECTION
TO BS8888. ALL DIMS IN mm



DO NOT SCALE

DRAWN
KPRS

DATE
07/12/2015

FIRST USED ON

WIRING COLOUR CODES

BL = BLUE WH = WHITE
YW = YELLOW OR = ORANGE
GN = GREEN VT = VIOLET
RD = RED GY = GREY
BK = BLACK

SHEET
1 OF 1

SCALE
NTS

CASH BASES



TITLE
MULTIVOLTAGE 170mm DEEP
(THERMAL FUSE) 12/24V S.D.O/C.

Cash Bases Ltd.
Newhaven,
East Sussex BN9 0LA
United Kingdom
Tel: +44 (0)1273 616300
Fax: +44 (0)1273 512010
www.cashbases.co.uk

DRAWING NUMBER

MUL-M11

REV

A

No part of this drawing may be reproduced or transmitted by any form, or in any means including photocopying and recording, without prior permission of Cash Bases Ltd. Newhaven, East Sussex.