


LOCK SET ASSEMBLY INSTRUCTIONS

FOR SERIES 100, 4000, AND 6000 CASH DRAWERS

SERIES 100 CASH DRAWER

1. REMOVE THE TILL AND INNER DRAWER FOLLOWING THE OPERATING AND MAINTENANCE INSTRUCTIONS.
2. REMOVE AND DISCARD THE PIN THAT SECURES THE LOCK ROD TO THE LOCK. A SMALL TOOL MAY BE REQUIRED.
3. PULL THE CURRENT LOCK ASSEMBLY OUT AND INSERT THE NEW LOCK ASSEMBLY INTO THE FRONT PANEL.
4. INSERT THE PIN THROUGH THE LOCK ROD AND LOCK. THE ROUND END OF PIN SHOULD GO INTO THE LOCK ROD FIRST.
5. THE PIN MAKES AN AUDIBLE 'CLICK' WHEN FULLY INSERTED AND FLUSH TO THE LOCK ROD.

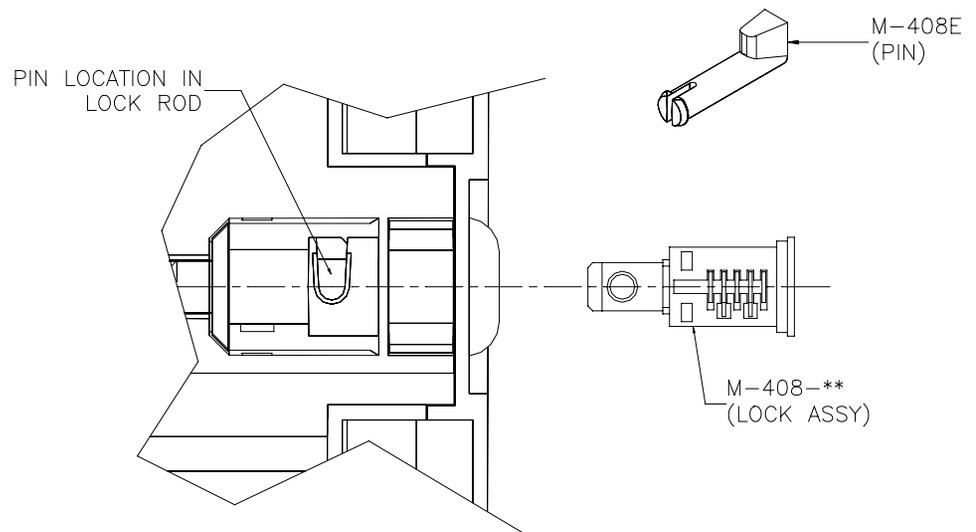

BOTTOM VIEW OF SERIES
100 INNER DRAWER

THIS KIT CONTAINS PARTS FOR THREE DIFFERENT
CASH DRAWERS. DISCARD UNUSED PARTS.





LOCK SET ASSEMBLY INSTRUCTIONS

FOR SERIES 100, 4000, AND 6000 CASH DRAWERS

SERIES 4000 AND SERIES 6000 CASH DRAWER

1. REMOVE THE TILL AND INNER DRAWER FOLLOWING THE OPERATING AND MAINTENANCE INSTRUCTIONS.
2. PULL OFF BLACK LOCK CAM AND REMOVE CURRENT LOCK ASSEMBLY. DISCARD BOTH OF THESE PIECES.
3. ATTACH THE NEW LOCK CAM TO THE LOCK ROD BY ORIENTING THE LOCK ROD AND LOCK CAM AS SHOWN IN VIEW A. THEN ROTATE THE LOCK CAM 90° SO THE FINAL RESULT LOOKS LIKE VIEW B.
4. INSERT THE NEW LOCK ASSEMBLY INTO THE FRONT PANEL THEN SLIDE ON THE CAM STOP. FINALLY PRESS THE LOCK CAM INTO THE LOCK, AS SHOWN IN VIEW C.

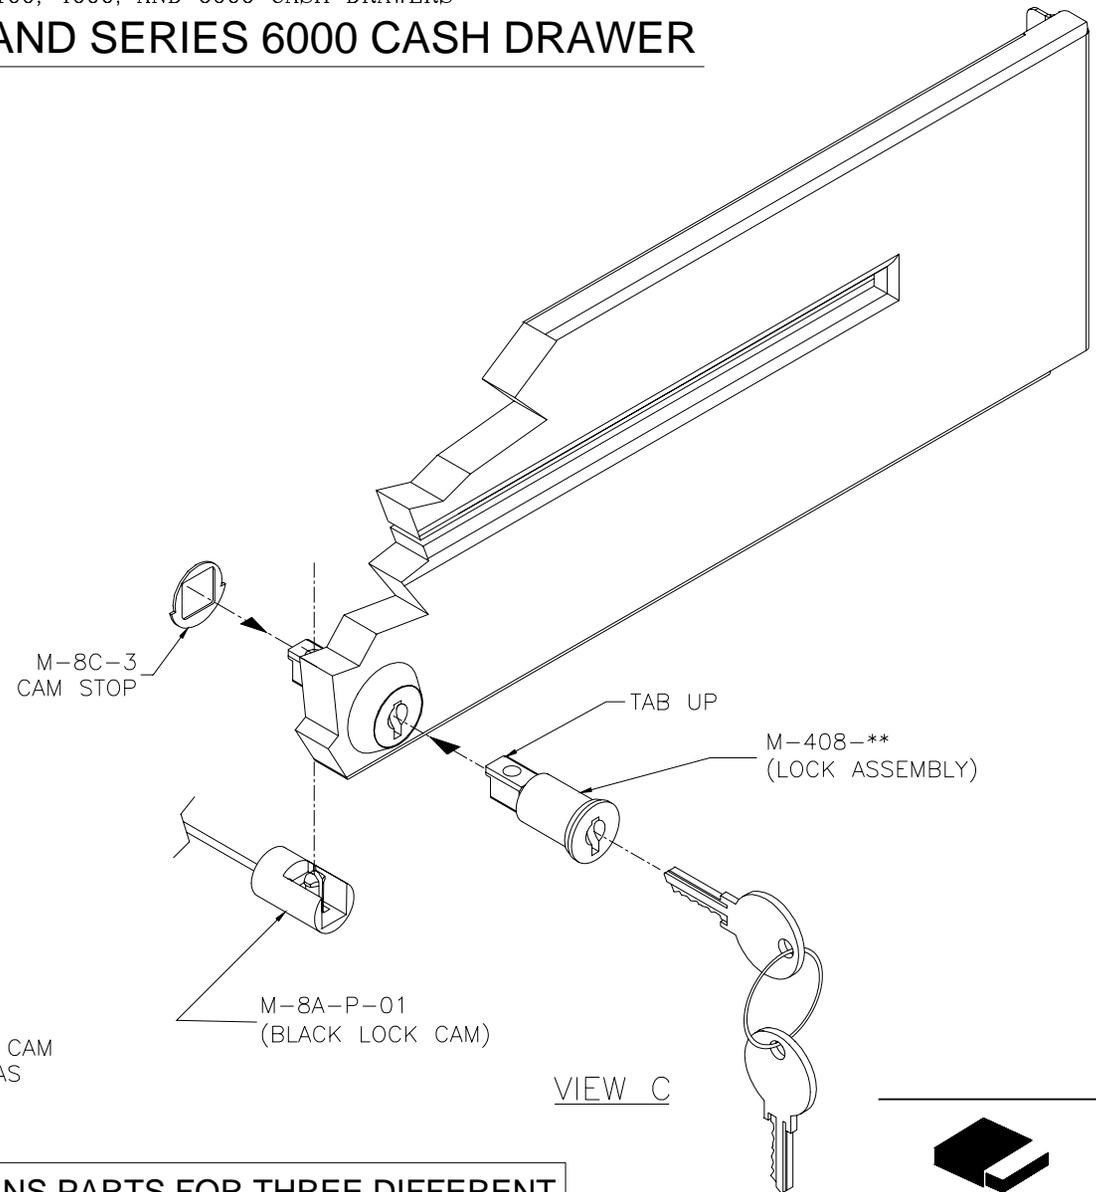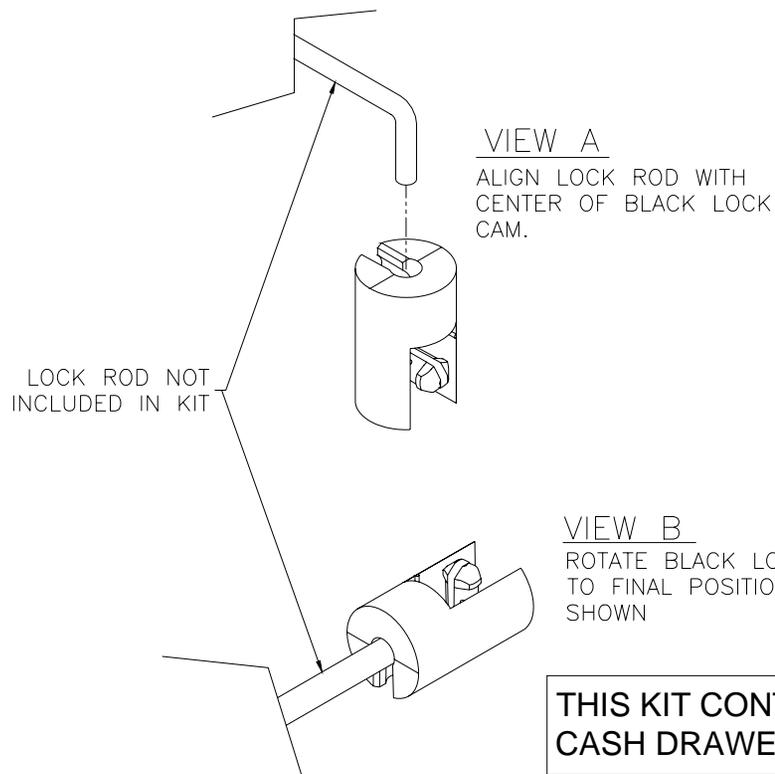

THIS KIT CONTAINS PARTS FOR THREE DIFFERENT CASH DRAWERS. DISCARD UNUSED PARTS.

